


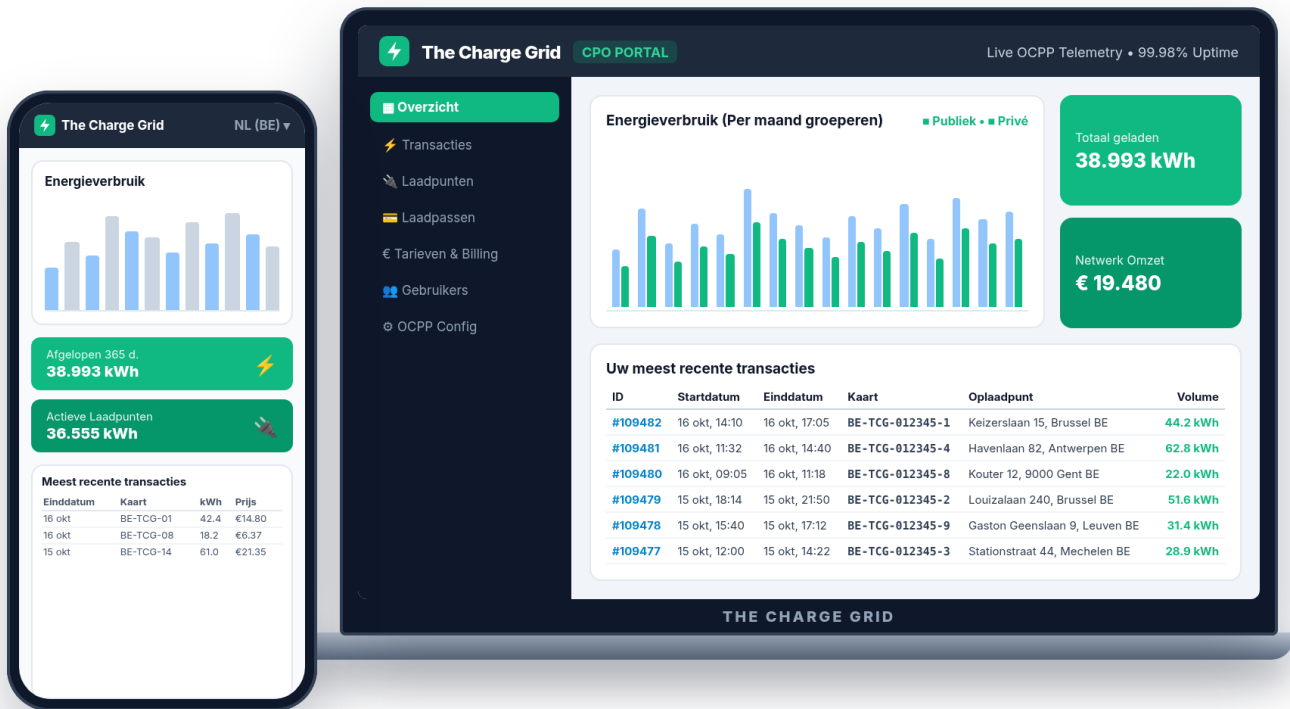

Private (VPN) The Charge Grid SIM Card

APN Settings:

- APN Name: evc-net.apn
- APN username: leave empty
- APN password: leave empty

OCPP-J 1.5/1.6 endpoint: ws://ws-private.evc-net.com/

Secure OCPP-J 1.6 endpoint: wss://ws-private.evc-net.com

Important

- configuration key WebSocketPingInterval: **240**

Public SIM Card, LAN, WLAN

OCPP-J 1.5/1.6 endpoint: ws://ws.evc-net.com

Secure OCPP-J 1.6 endpoint: wss://ws.evc-net.com/

Important

- configuration key WebSocketPingInterval: **180**
- Ws Port: 80
- Wss Port: 443
- Path: /

DNS Settings:

Important

- DNS Setting: Automatic (if not possible, see below)
- Private Primary: 10.63.1.63
- Private Secondary: 10.63.1.64
- Public Primary: 8.8.8.8
- Public Secondary: 8.8.4.4

General Parameter Setup

Use the values below to configure the parameters.

For chargers using OCPP:

ClockAlignedDataInterval: 0

WebSocketPingInterval: 180

MeterValueSampleInterval:

- For 3.22 kW 600
- For 22.100 kW 120
- For > 100 kW 60

HeartbeatInterval: 3600

TransactionMessageAttempts: 90

TransactionMessageRetryInterval: 86400

ConnectionTimeOut: 90